




EXPERIENCE THE EXCEPTIONAL

# AES-15™

## Oil Support System

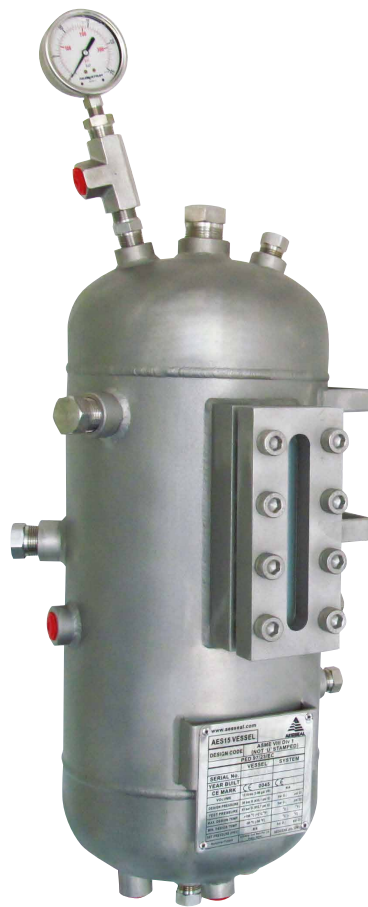

### Features

- 316 SS vessel construction
- Enhanced modular design
- Cooling coil as standard
- Vessels are designed and manufactured in accordance with ASME VIII Div.1 and PED 2014/68/EU

### Benefits

- Robust vessel suitable for a range of challenging environments
- Available in threaded as standard or flanged construction
- Additional cooling available for high heat applications
- Suitable for a wide range of arduous environments.  
Design rating 30 bar @ 100°C / 435 psi @ 212°F



The AES-15™ vessel forms the core of a robust, low maintenance and highly reliable barrier fluid system. This vessel is constructed with 316 Stainless Steel and is designed to meet the high end needs of the Chemical, Pharmaceutical and Petrochemical industries. The AES-15™ cleverly combines American and European standards, thus allowing the one vessel to accept top entry (float) or side entry (ultra-sonic) level switches. Both oil and water can be used as barrier fluids with the AES-15™, ensuring its compatibility with a wide range of industrial pump applications. The AES-15™ is designed and manufactured to ASME VIII Div.1 and certified by TÜV to cover PED requirements.



## Specifications Standard Offering

### Vessel:


**Construction:** 316 Stainless Steel  
**Pressure limit:** 30 bar / 435 psi  
**Temperature limit:** 100°C / 212°F  
**Capacity:** 15 litres / 3.96 gal (US)  
**Connections:** 1/2" NPT for seal feed and return hoses\*  
**Finish:** Satin bead blast  
**Designed to:** ASME VIII Div.1 and certified by TÜV to cover PED requirements  
**3/4" NPT side entry, 1" NPT top entry**

### Weld Pad Level Gauge:

**Body:** 316 Stainless Steel  
**Top plate:** 316 Stainless Steel  
**Bolts:** 316 Stainless Steel  
**Gaskets:** PTFE  
**Pressure limit:** 30 bar / 435 psi  
**Temperature limit:** 100°C / 212°F

### Optional Extras:

**Level Switch:** 1" NPT top entry (float) and 3.4" NPT side entry (ultra-sonic) Explosion Proof and Intrinsically Safe options  
**Pressure Switch:** Explosion Proof and Intrinsically Safe options  
**Pressure Gauge:** 316 Stainless Steel (wetted parts option available)  
**Hand Pump:** Oil & Water options  
**Nitrogen Regulator Assembly**

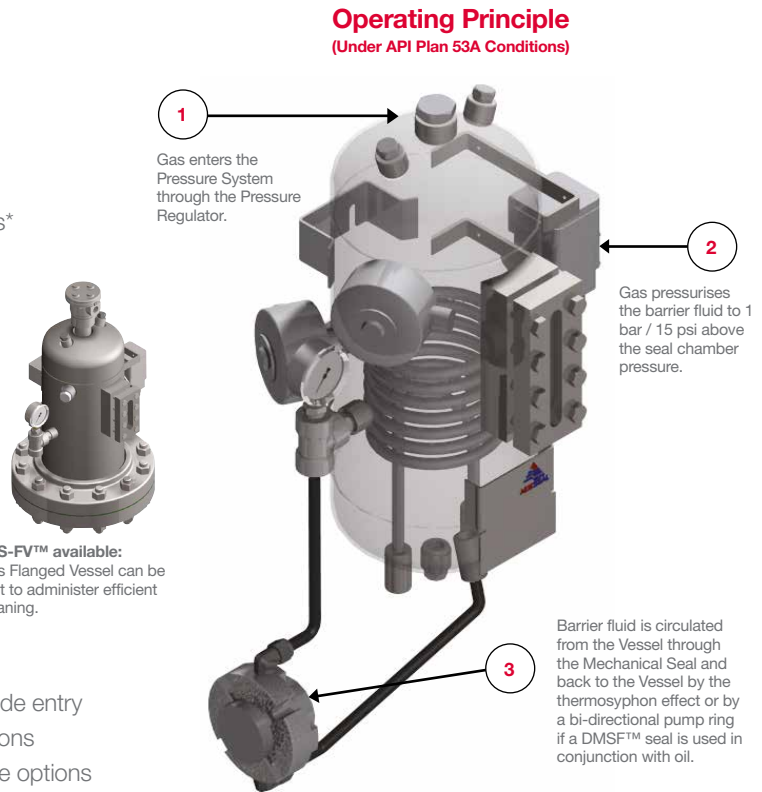

**AES-FV™ available:**  
This Flanged Vessel can be split to administer efficient cleaning.

**Barrier & buffer fluid systems for use with double mechanical seals.** AESSEAL® supplies an extensive range of barrier and buffer fluid systems for use with double mechanical seals. Wherever possible AESSEAL® prefers to supply both the seal and the system. In addition the company will suggest suitable barrier or buffer fluids for most applications, based on extensive field experience. AESSEAL® accepts no responsibility for any problems associated with system design, installation, operation, or the use of an unsuitable barrier or buffer fluid, where the fluid, seal or any part of the system have not been specified and / or supplied by AESSEAL®

For further information and safe operating limits contact our technical specialists at the locations below.



### UK Sales & Technical advice:

AESSEAL plc  
 Mill Close  
 Bradmarsh Business Park  
 Rotherham, S60 1BZ  
 United Kingdom  
 Tel: +44 (0) 1709 369966  
 Fax: +44 (0) 1709 720788  
 E-mail: [seals@aessteel.com](mailto:seals@aessteel.com)

Distributed by:

'Our purpose is to give our customers such exceptional service that they need never consider alternative sources of supply.'



Use double mechanical seals with hazardous products.

Always take safety precautions:

- Guard your equipment
- Wear protective clothing

**WARNING**

### USA Sales & Technical advice:

AESSEAL Inc.  
 355 Dunavant Drive  
 Rockford,  
 TN. 37853  
 USA  
 Tel: +1 865 531 0192  
 Fax: +1 865 531 0571  
 E-mail: [usa@aessteel.com](mailto:usa@aessteel.com)

**Important:** Since the conditions and methods of use of this product are beyond our control, AESSEAL plc expressly disclaims any and all liability resulting or arising from any use of this product or reliance on any information contained in this document - AESSEAL plc standard conditions of sale apply. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time. AESSEAL® is a Registered Trademark of AES Engineering Ltd, AESSEAL plc recognizes all trademarks and trademark names as the property of their owners.